



**GmbH**

**Your partner for door-, window- and facade engineering**

# **Fit-in screwdriver**


**rod form GFT - SD 2200**

**with sliding forepart and depth disconnection**

**& hose package**

**2200 1/min**

\*\*\*\*\*

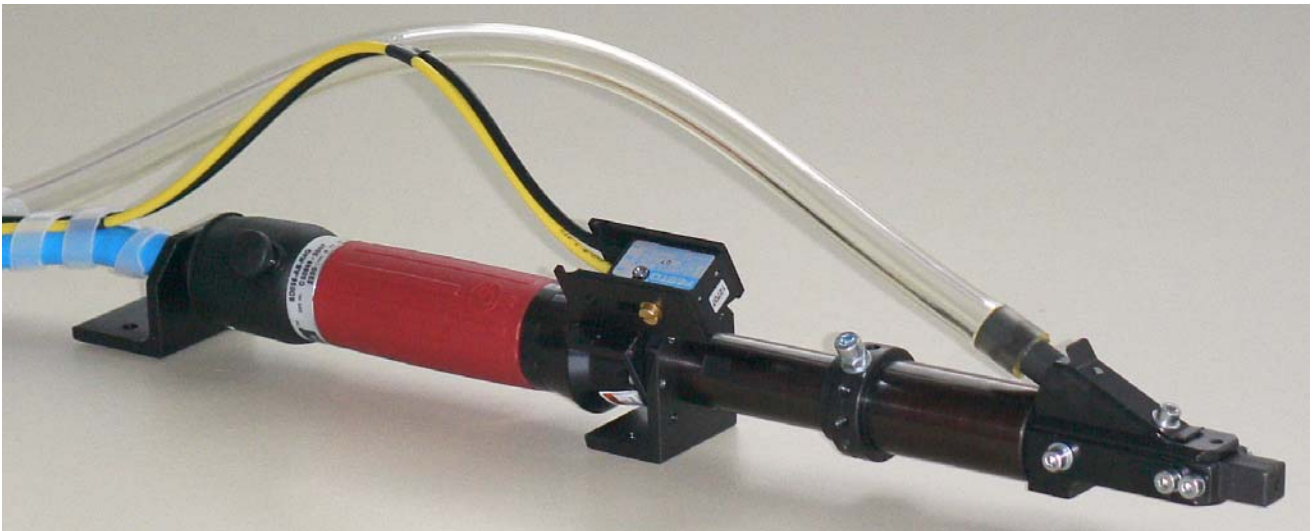

\*\*\*\*\*

**free accessible sliding clutch for torque adjustment**

**combinable with feed unit**

## field of application :

- in connection with an automatic screw feeding device MF-2 or MF-3 and hose package
- the unit is equipped with a fastening system for assembling on plane surfaces (e.g. for use on assembling tables)
- option manual screw feed „J“ + automatic screw feed
- option screwer jaw-forepart „B“ to avoid damage on the profile (e.g. caused by opening screwer jaws)

## application :

- for screwing fastening elements into metal (e.g. plate with drilling screw), PVC, wood or similar material with depth disconnection, if a torque of 4,5 Nm is not exceeded.

## structure :

- handheld screwdriver ( Desoutter) SD 2200 AR
- press-on start
- sliding forepart
- easy accessible sliding clutch with torque adjustment
- easy accessible adjustment of depth disconnection
- 4 fixation drillings for assembling on plane surface

## technical data :

- revs/min : 2200 1/min
- torque : 1,0 Nm – 4,5 Nm
- weight : 1,9 kg
- bit : PH2 ; 170 mm long (option parted bit)
- screws : countersunk-, drilling- and self-tapping screws
  - screw length 15 - 40 mm
  - screw diameter Ø 3,5 - Ø 4,2 mm
  - head diameter Ø 6,0 - Ø 8,2 mm

## working posture :

- type with automatic screw feed: any posture
- type with manual feed: vertical (down) to horizontal posture



GmbH Geräte- und Vorrichtungsbau

tel.: 035828 / 72255

fax: 035828 / 70743

Sohländer Str. 2 02894 Reichenbach OL

internet: <http://www.gevo-gmbh.de>

e-mail: [kontakt@gevo-gmbh.de](mailto:kontakt@gevo-gmbh.de)